


СТАЦИОНАРНЫЕ ДВИГАТЕЛИ СЕРИИ TCD 2012

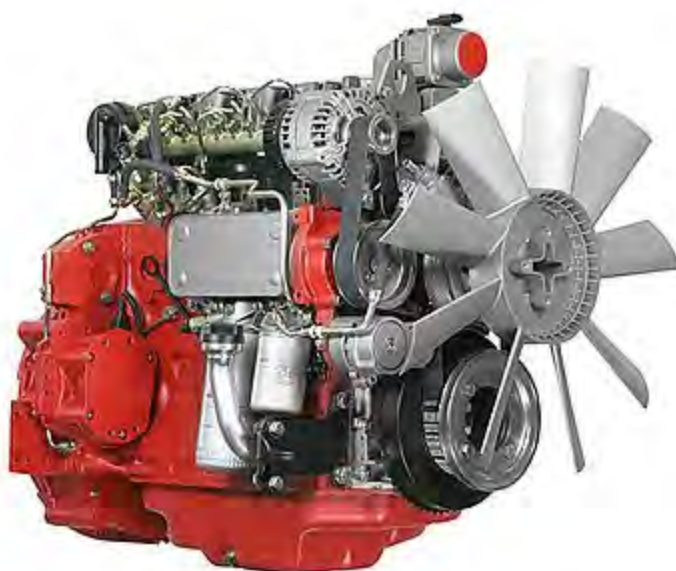

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://deutz.nt-rt.ru> || dze@nt-rt.ru


TCD 2012

For stationary sets

66 - 155 kW | 91 - 210 hp at 2400 min⁻¹ | rpm

EU Stage IIIA / US EPA Tier 3

- Water-cooled 4 and 6-cylinder inline engines with turbocharging and charge air cooling
- The compact engine design and three PTO drive possibilities integrated into the gear drive reduce the installation costs and offer numerous application possibilities.
- The powerful DEUTZ Common-Rail (DCR®) injection system and the electronic engine control (EMR 3) with intelligent link to the drive management ensure optimum engine performance at low fuel consumption.

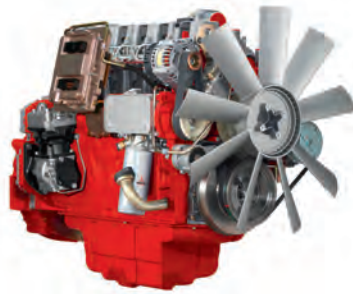

- The 4-cylinder is also available with a mechanical injection system in the power range up to 88 kW.

- Best cold starting properties even under extreme conditions.
- The 4-cylinder is also available with an optional mass compensation gear for low noise emissions and very smooth running so that expensive insulation measures can be omitted.
- Long oil change intervals and easy changing of the engine fluids reduce the running costs and increase the availability of the machinery.
- The robust engine design allows worldwide operation even with high sulphur fuels.

Technical data

Engine type		TD 2012 L4 ⁵⁾	TCD 2012 L4 ⁵⁾	TCD 2012 L4	TCD 2012 L6	
No. of cylinders		4	4	4	6	
Bore/stroke		mm in	101/126 4.0/5.0	101/126 4.0/5.0	101/126 4.0/5.0	
Capacity		l cu in	4.04 247	4.04 247	6.06 370	
Compression ratio			18:1	18:1	18:1	
Nominal speeds		min ⁻¹ rpm	2000 - 2300	2000 - 2400	2000 - 2400	
Power output ¹⁾		TD 2012 L4 ⁵⁾	TCD 2012 L4 ⁵⁾	TCD 2012 L4	TCD 2012 L6	
Power output as per ISO 14396		kW hp	66 88.5	88 118	103 138	155 208
at speed		min ⁻¹ rpm	2300	2400	2400	
Max. torque		Nm lb/ft	350 258	420 310	520 384	810 ⁴⁾ 597
at speed		min ⁻¹ rpm	1600	1600	1600	
Minimum idling speed		min ⁻¹ rpm	900	900	650	
Specific fuel consumption ²⁾		g/kWh lb/hph	237 0.39	216 0.355	204 0.335	208 0.342
Weight as per DIN 70020 Part 7A ³⁾		kg lb	400 882	400 882	400 882	510 1124

1) Capacity data without deduction of fan capacity

2) Best full load consumption refers to diesel with a density of 0.835 kg/dm³ at 15°C | 6.96 lb/US gallon at 60°F.

3) Without starter/dynamo, cooler and fluids but with flywheel and flywheel housing.

4) 850 Nm | 627 lb-ft with switched internal EGR (exhaust gas return)


5) Mechanical injection system

The data on this data sheet are for information purposes only and are not binding values. The data in the quotation is definitive.


Torque curve

TCD 2012 L4 - 103 kW|138 hp



TCD 2012 L4 - 88 kW|118 hp

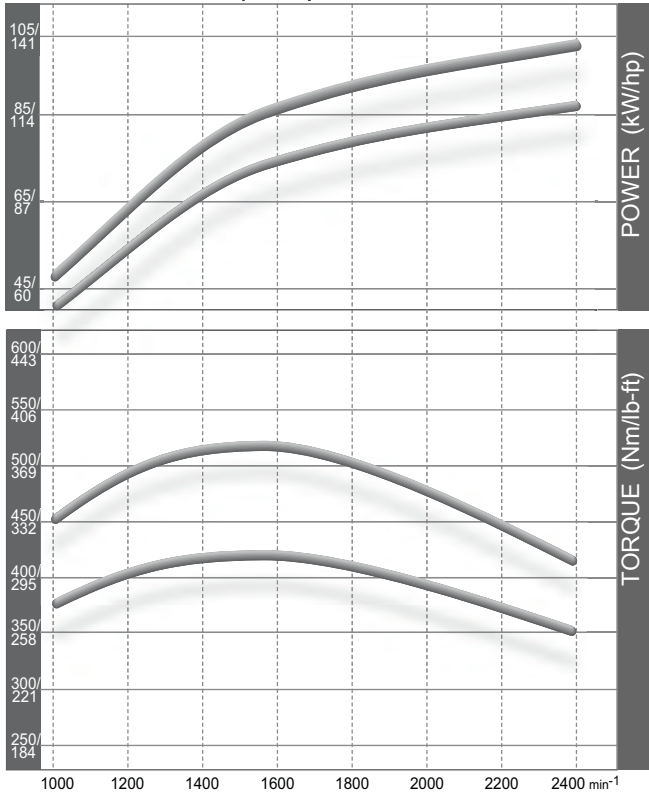

TCD 2012 L6 - 155 kW|208 hp

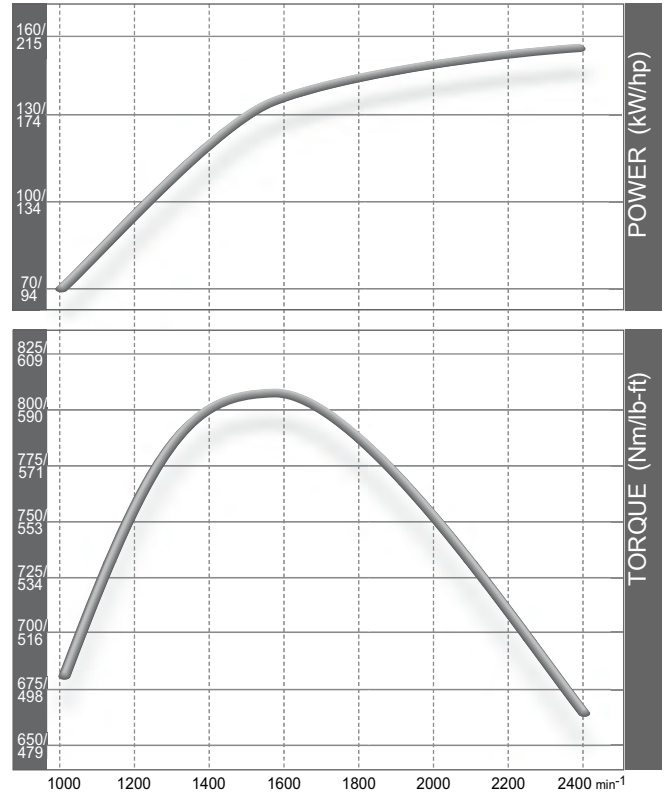

Dimensions

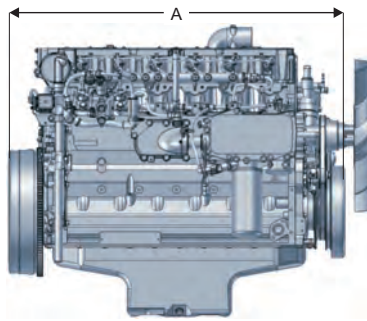


		A		B		C	
TD 2012 L4 MECH.	mm in	766 *	30.16	628 24.72	825 32.48		
TCD 2012 L4 DCR®	mm in	791 **	31.14	628 24.72	823 32.40		
TCD 2012 L6 DCR®	mm in	1018 **	40.08	659 25.94	893 35.16		

* V-belt drive

** Poly-V belt drive

Note: The engine dimensions and weights vary depending on the scope of delivery.

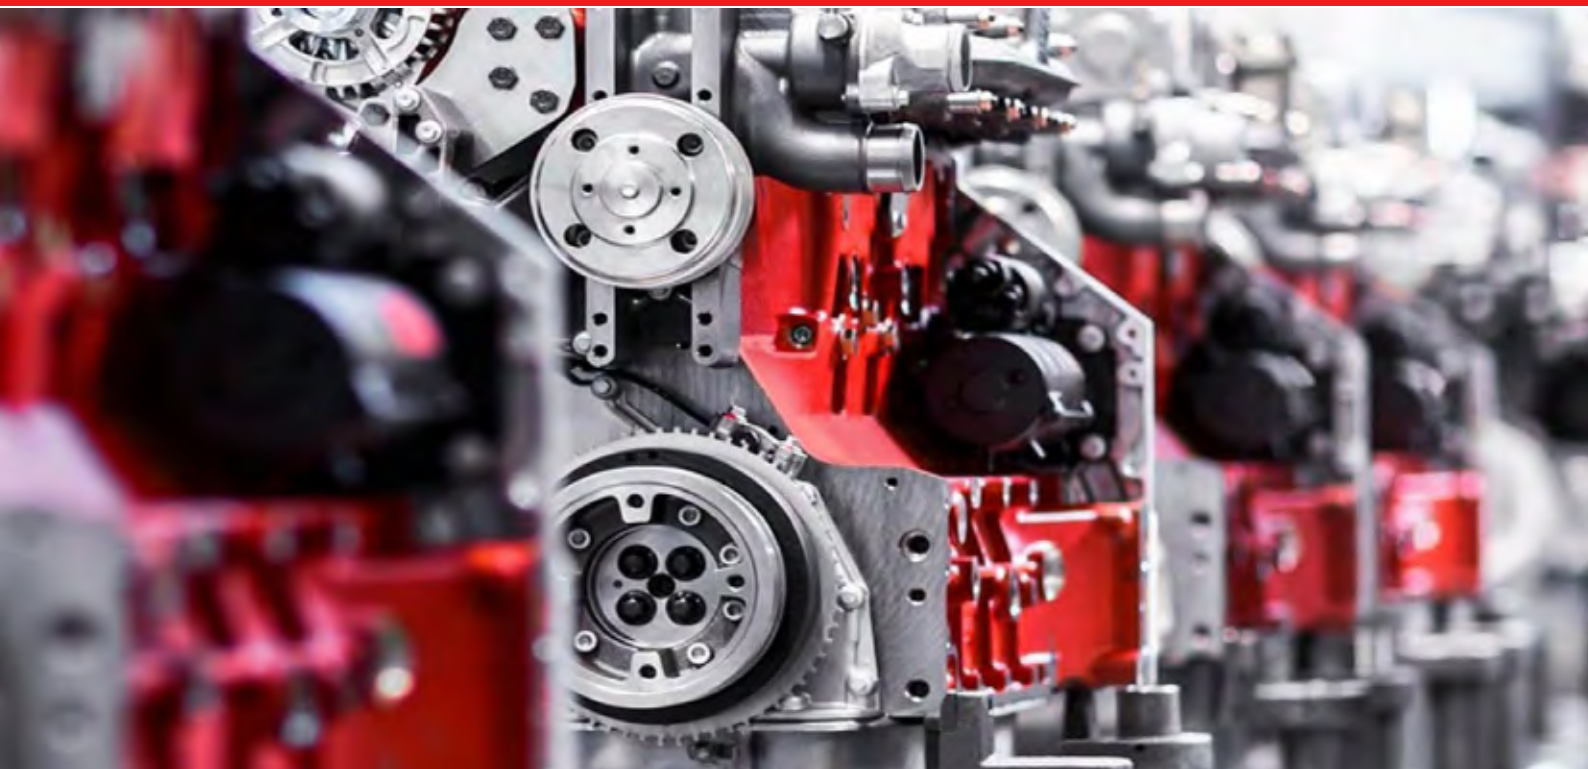

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://deutz.nt-rt.ru> || dze@nt-rt.ru